
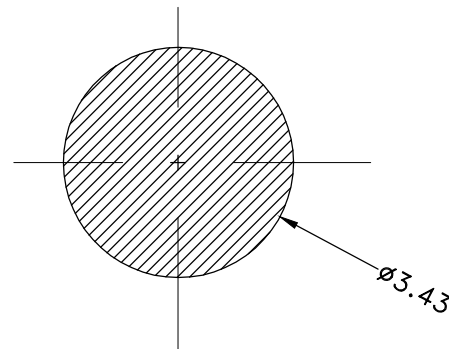


CUSTOMER OUTLINE DRAWING

REVISIONS			
REV	DESCRIPTION	DATE	APPR
x1	Initial Release	13-Dec-23	S.X

NOTES:

- 1.Material
1-1 Body: Copper Alloy C6801
- 2.Finish
2-1 Body:10u" Min. Gold over 100u" Min. Nickel
- 3.Mechanical Specification
3-1 Durability: 20,000 cycles Min.
- 4.Electrical Specifications
4-1 Rating Voltage:24V
4-2 Rating Current: 3A
4-3 Contact Resistance: 30 mohms max.at working height
- 5.Environmental Performance
5-1 Storage and operating temperature range:
-55°C~+125°C
5-2 Humidity: 10% RH to 90% RH.
5-3 Salt Spray: 48H min.
5-4 Withstanding High Temperature:260°C/10Sec
5-5 RoHS and REACH Compliant
- 6.Package: Tape&Reel

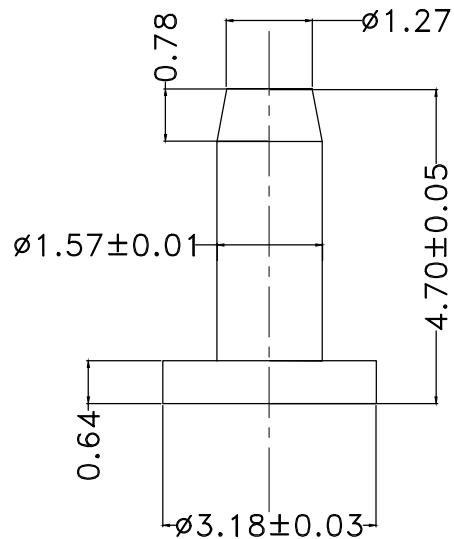

RECOMMENDED PCB LAYOUT(±0.05)

UNLESS OTHERWISE SPECIFIED,TOLERANCE ARE:
X.±0.5 .X±0.1 .XX±0.05 .XXX±0.005 ANGEL±2

NOTICE- These drawing,specifications,or other date are,and remain property of wizconn corparation.(2)are confidential and not to be disclosed to any person other than those to whom they are given by wizconn corparation,or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner liscensing, granting rights to permitting such holder or any others person to manufacture,use or sell any product,process or design, patented or otherwise,that may in any way be related to or disclosed by said drawings,specifications,or other date.

TITLE:

Solid Pin(Ø1.57*4.7mm)




深圳市为致康科技有限公司
Shenzhen Wizconn Technology Ltd.

USE ON: CUSTOMER	DESIGN: Brandon.Z	DWG NO.: SXP163247-1-TR
MATERIAL:	CHECK: Scott.X	PART NO.: SXP163247-1-TR
FINISH:	APPROVED: Cliff.H	SCALE: 1:1 REV: X1 SHEET: 1 OF 2
THIRD ANGLE PROJECTION	UNIT: mm	CAD FILE:

Remark:

- (1) Total tolerance for any 10 ratchet holes not exceed: $\pm 0.20\text{mm}$.
- (2) The unspecified tolerance is: $\pm 0.20\text{mm}$.
- (3) A0,B0 are bottom dimension of the cavity, K0 is height of carrier tape.
- (4) Empty length is 47cm*2(50 empty caves*2)

REVISIONS			
REV	DESCRIPTION	DATE	APPR
1	Initial Release	13-Dec-23	S.X

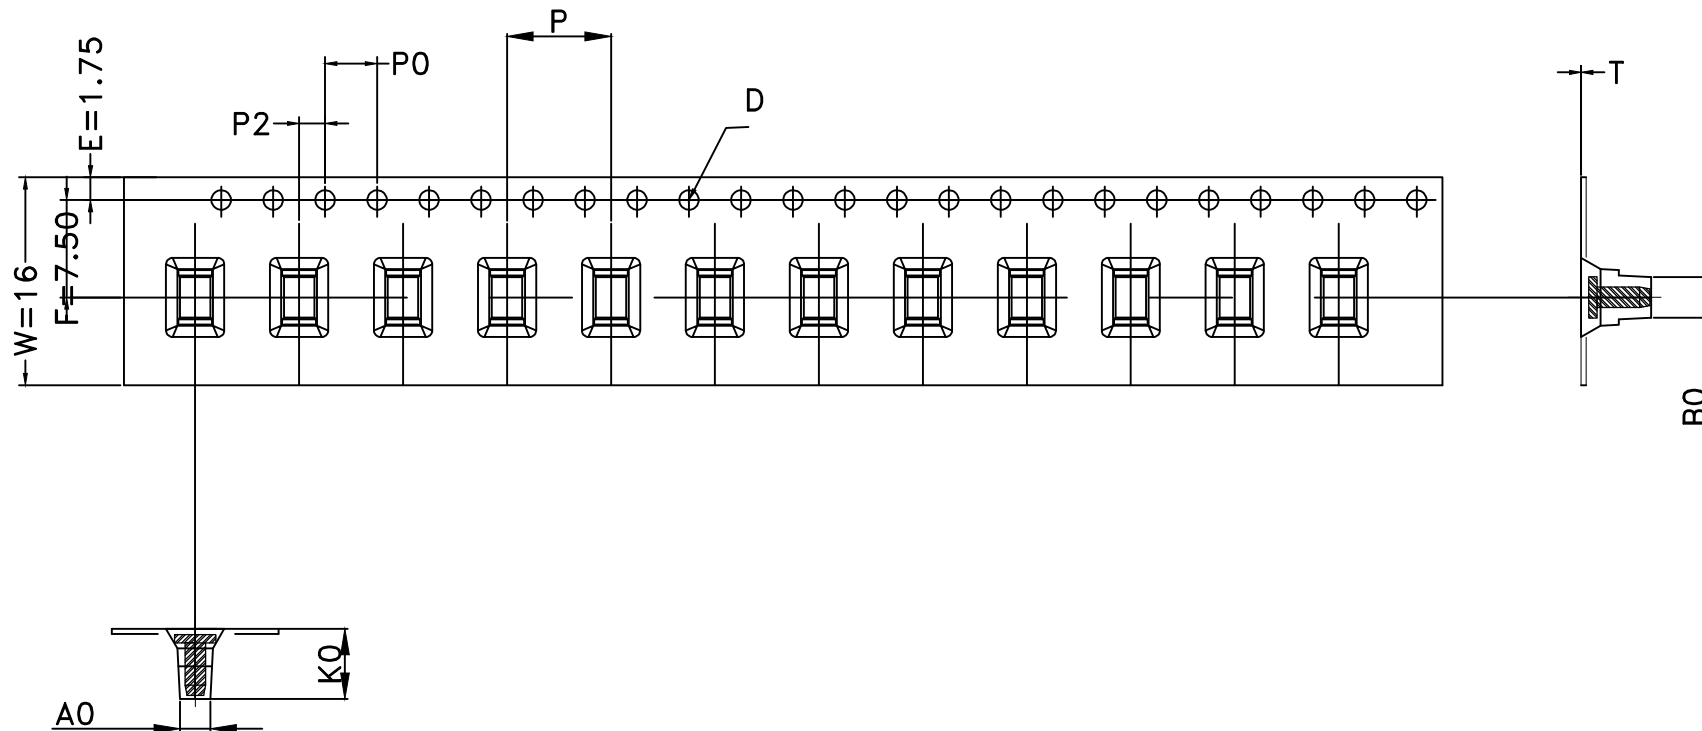

ITRM	W	A0	B0	K0	P	F	E	D	D1	P0	P2	T	13"
DTM	16.0	2.60	3.45	5.70	8.00	7.50	1.75	1.50	2.00	4.00	2.00	0.40	Length Qty/Reel
TOLE	+0.30 -0.30	+0.15 -0.15	+0.15 -0.15	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.10 -0.10	+0.15 -0.15	+0.05 -0.05	12.60M 1500Pcs

UNLESS OTHERWISE SPECIFIED,TOLERANCE ARE:
X.±0.5 .X±0.1 .XX±0.05 .XXX±0.005 ANGEL±2°

NOTICE- These drawing,specifications,or other date are,and remain property of wizconn corporation,(2)are confidential and not to be disclosed to any person other than those to whom they are given by wizconn corporation,or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any others person to manufacture,use or sell any product,process or design, patented or otherwise,that may in any way be related to or disclosed by said drawings,specifications,or other date.

TITLE:

SXP163247-1-TR CARRIER TAPE



深圳市为致康科技有限公司
Shenzhen Wizconn Technology Ltd.

USE ON: CUSTOMER

DESIGN: Jason

DWG NO.: SXP163247-1-TR

MATERIAL:

CHECK: Jason

PART NO.: SXP163247-1-TR

FINISH:

APPROVED: Cliff

SCALE: 1:1

REV: 1

SHEET: 2 OF 2

THIRD ANGLE PROJECTION

UNIT: mm

CAD FILE: