


CUSTOMER OUTLINE DRAWING

REVISONS			
REV	DESCRIPTION	DATE	APPR
1	Initial Release	7-Mar-24	S.X

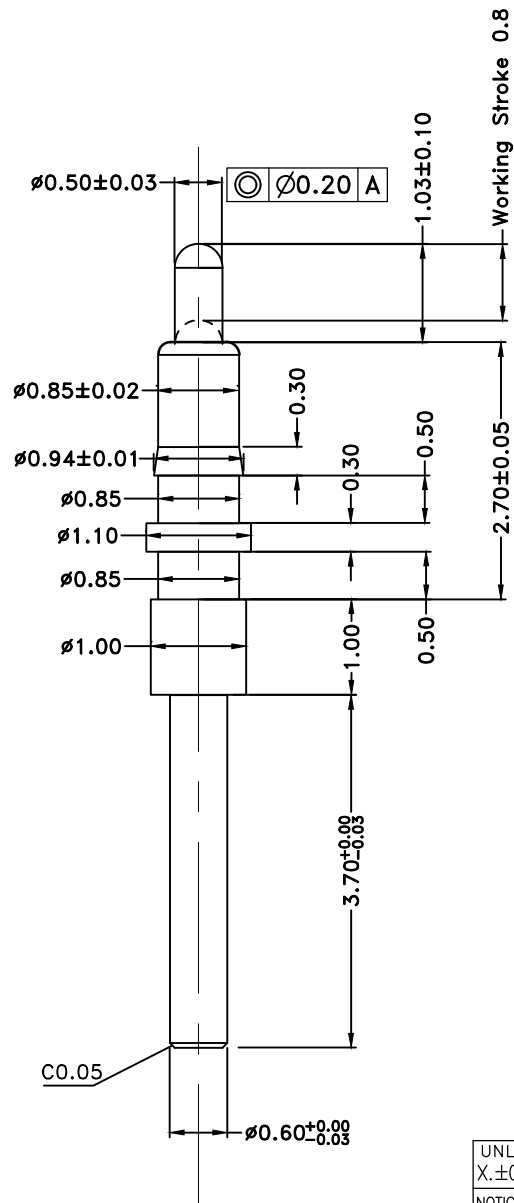

NOTES:

- Material
 - Plunger: Copper Alloy C3604,
 - Body: Copper Alloy C3602.
 - Spring: Stainless steel
- Finish
 - Plunger: 5u" Min. Gold over 50~100u" Min. Nickel
 - Body: 5u" Min. Gold over 50~100u" Min. Nickel
- Mechanical Specification
 - Spring Force: $30 \pm 20\%$ gf at Working height
 - Durability: 10,000 cycles
- Electrical Specifications
 - Rating Voltage: 5VDC.
 - Rating Current: 1A Min.
 - Contact Resistance: 30 milliohms max. at working height
- Environmental Performance
 - Storage and operating temperature range: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 - Humidity: 10% RH to 90% RH.
 - Salt Spray: 48H Min.
 - RoHS Compliant
- Package: PE BAG(Bulk)

UNLESS OTHERWISE SPECIFIED, TOLERANCE ARE:
X. ± 0.5 .X ± 0.1 .XX ± 0.05 .XXX ± 0.005 ANGEL ± 2

NOTICE- These drawing, specifications, or other data are, and remain property of wizconn corporation. (2) are confidential and not to be disclosed to any person other than those to whom they are given by wizconn corporation, or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

TITLE:

POGO PIN
($\phi 0.85 \times 4.73$)



深圳市为致康科技有限公司
Shenzhen Wizconn Technology Ltd.

USE ON: CUSTOMER	DESIGN: Jason	DWG NO.: DP094739-1-PB
MATERIAL:	CHECK: Jason	PART NO.: DP094739-1-PB
FINISH:	APPROVED: Cliff	SCALE: 1:1 REV: 1 SHEET: 1 OF 1
THIRD ANGLE PROJECTION	UNIT: mm	CAD FILE: