


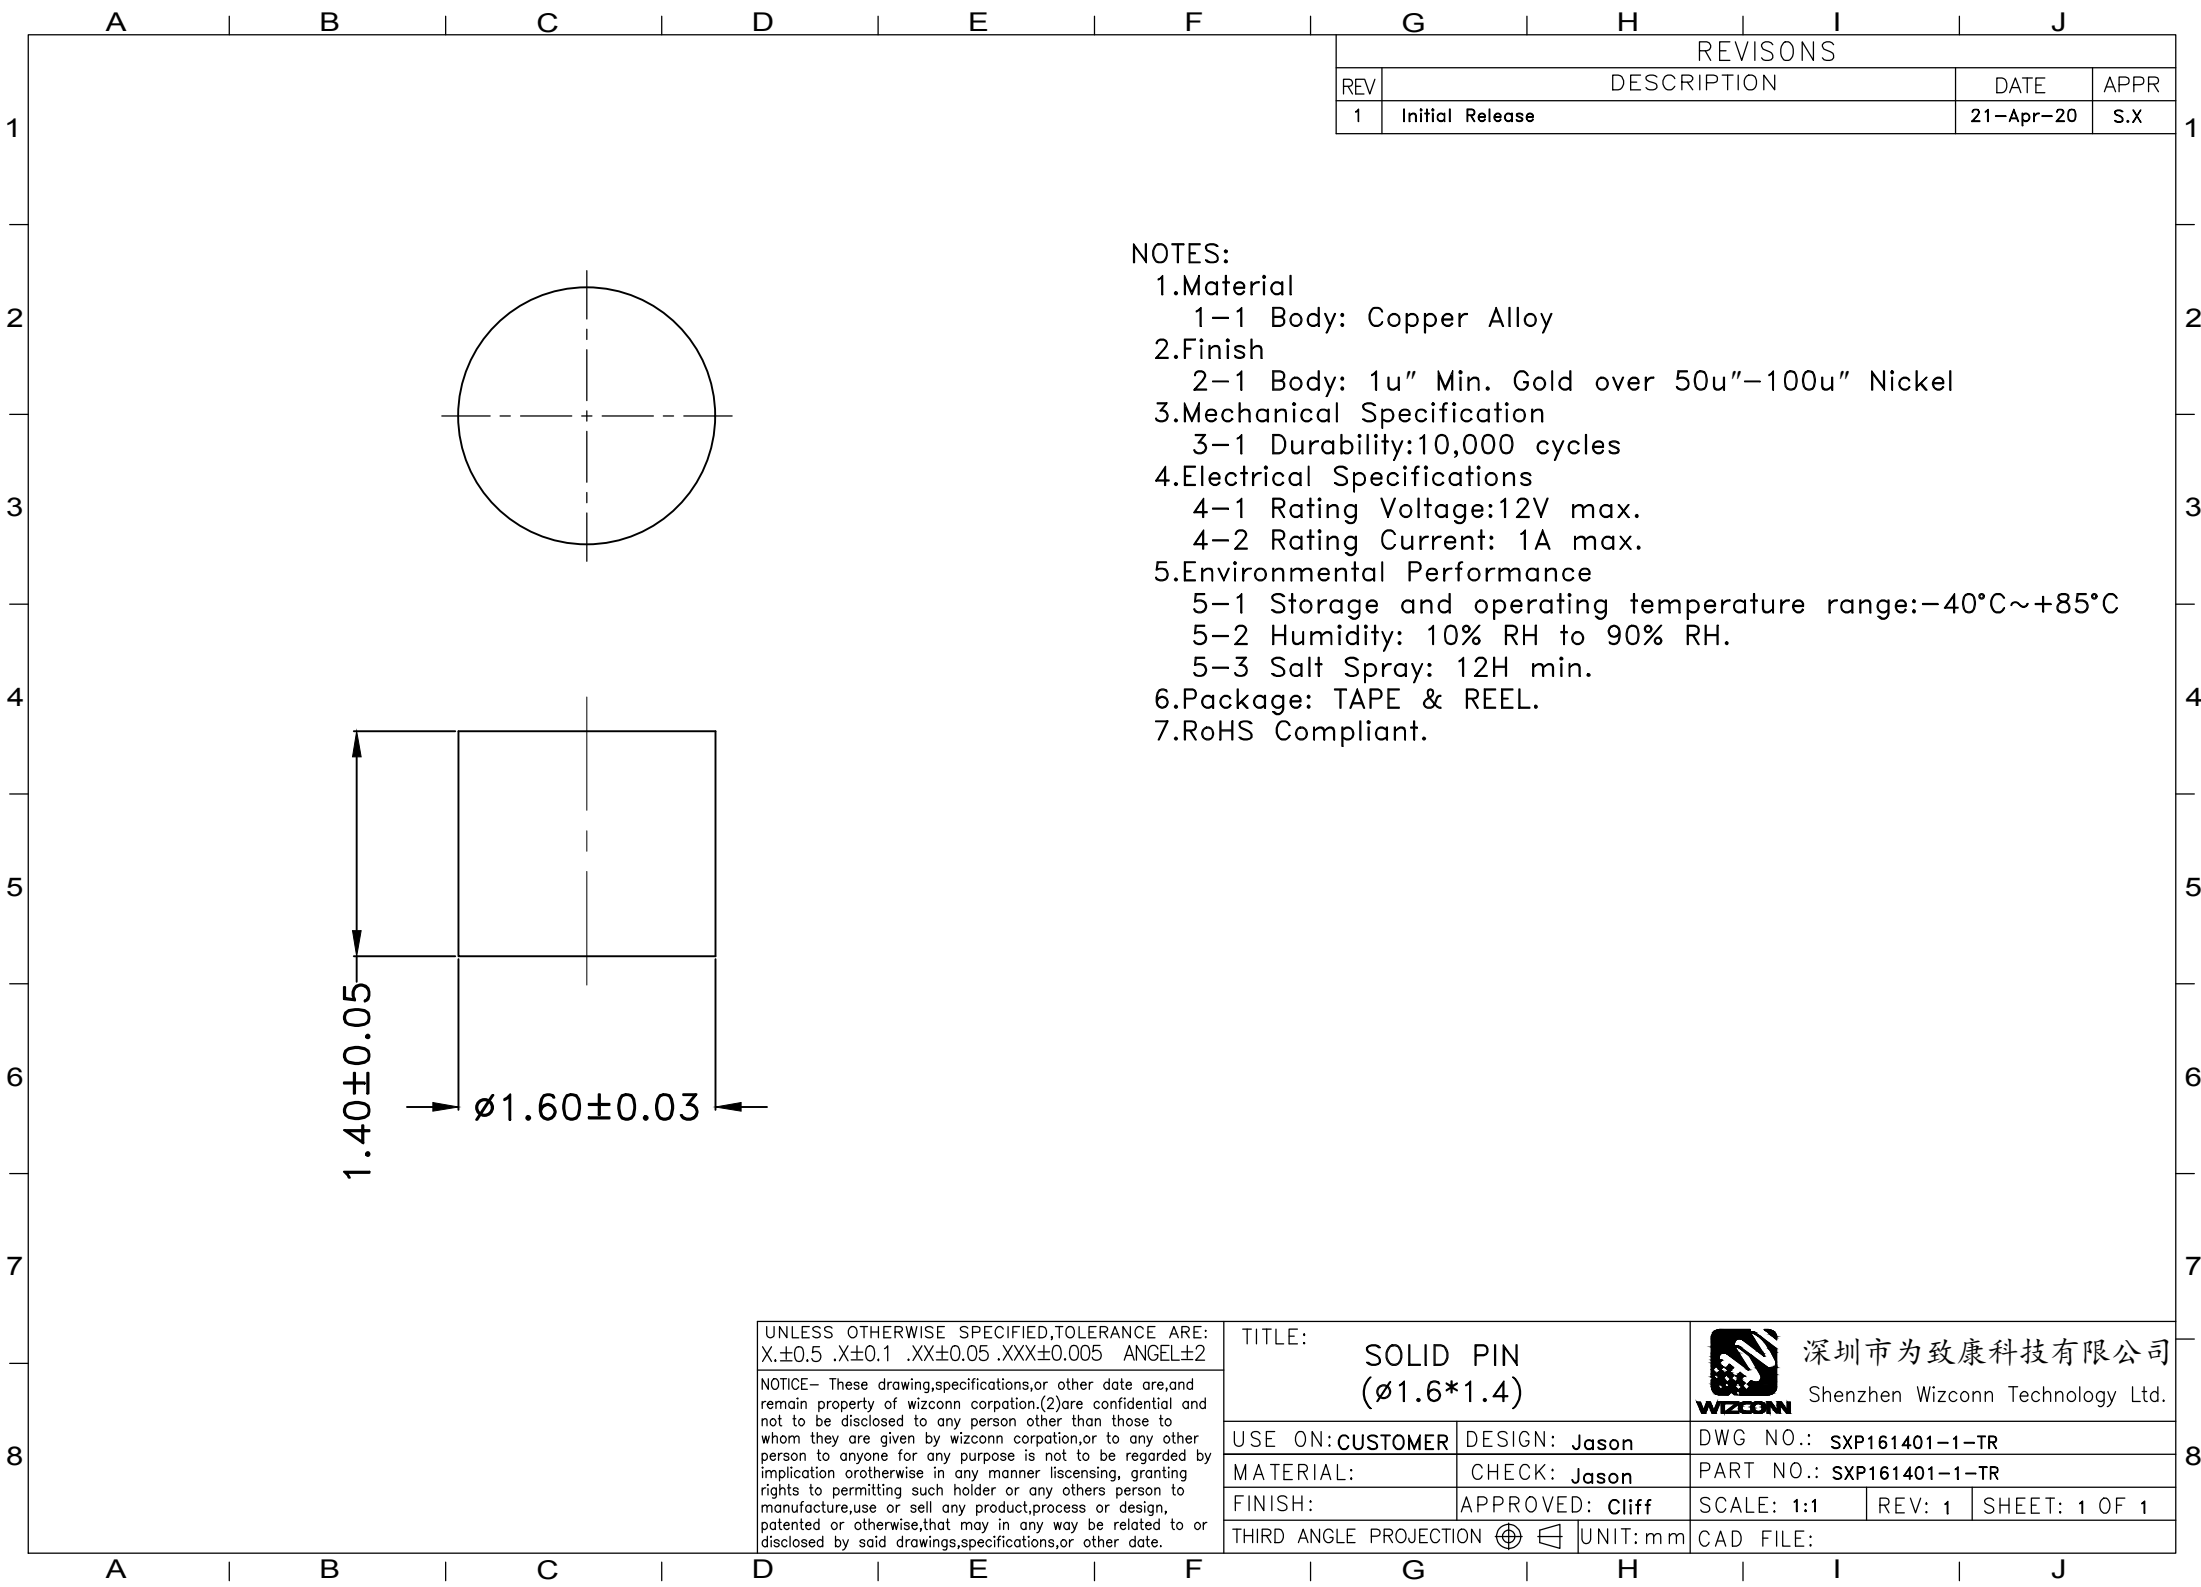

REVISES			
REV	DESCRIPTION	DATE	APPR
1	Initial Release	21-Apr-20	S.X

- NOTES:
- 1.Material
 - 1-1 Body: Copper Alloy
 - 2.Finish
 - 2-1 Body: 1u" Min. Gold over 50u"-100u" Nickel
 - 3.Mechanical Specification
 - 3-1 Durability:10,000 cycles
 - 4.Electrical Specifications
 - 4-1 Rating Voltage:12V max.
 - 4-2 Rating Current: 1A max.
 - 5.Environmental Performance
 - 5-1 Storage and operating temperature range:-40°C~+85°C
 - 5-2 Humidity: 10% RH to 90% RH.
 - 5-3 Salt Spray: 12H min.
 - 6.Package: TAPE & REEL.
 - 7.RoHS Compliant.

UNLESS OTHERWISE SPECIFIED,TOLERANCE ARE: X.±0.5 .X±0.1 .XX±0.05 .XXX±0.005 ANGEL±2	TITLE: SOLID PIN (ø1.6*1.4)		 深圳市为致康科技有限公司 Shenzhen Wizconn Technology Ltd.		
	USE ON: CUSTOMER	DESIGN: Jason	DWG NO.: SXP161401-1-TR		
	MATERIAL:	CHECK: Jason	PART NO.: SXP161401-1-TR		
	FINISH:	APPROVED: Cliff	SCALE: 1:1	REV: 1	SHEET: 1 OF 1
	THIRD ANGLE PROJECTION 		UNIT: mm	CAD FILE:	