


A B C D E F G H I J

CUSTOMER OUTLINE DRAWING

REVISONS			
REV	DESCRIPTION	DATE	APPR
1	Initial Release	23-Jul-18	S.X

- NOTES:
- 1.Material
 - 1-1 Plunger: Copper Alloy,
 - 1-2 Body: Copper Alloy.
 - 1-3 Spring: stainless steel
 - 2.Finish
 - 2-1 Plunger:15u” Min. Gold over 50u” Min. Nickel
 - 2-2 Body:15u” Min. Gold over 15u” Min. Pd Co over 160 u”Copper base
 - 3.Mechanical Specification
 - 3-1 Spring Force: 50±10gf at Working height
 - 3-2 Durability:10,000 cycles
 - 4.Electrical Specifications
 - 4-1 Rating Voltage:36V max.
 - 4-2 Rating Current: 1.5A max.
 - 4-3 Contact Resistance: 50 mohms max.at working height
 - 5.Environmental Performance
 - 5-1 Storage and operating temperature range:-40°C~+85°C
 - 5-2 Humidity: 10% RH to 90% RH.
 - 5-3 Salt Spray: 48H min.
 - 5-4 Sweat Test: 168H min.
 - 5-5 Withstanding High Temperature:260°C/10S
 - 6.Package: PE bag

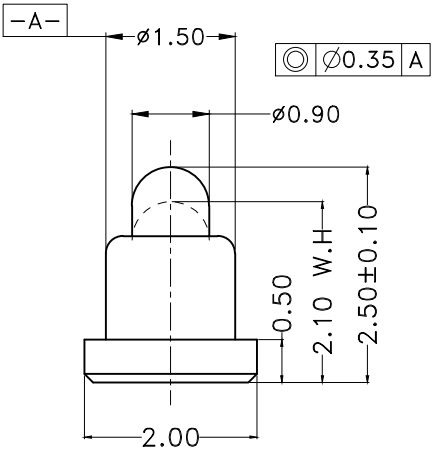

UNLESS OTHERWISE SPECIFIED,TOLERANCE ARE:
X.±0.5 .X±0.1 .XX±0.05 .XXX±0.005 ANGEL±2

NOTICE- These drawing,specifications,or other date are,and remain property of wizconn corporation.(2)are confidential and not to be disclosed to any person other than those to whom they are given by wizconn corporation,or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner liscensing, granting rights to permitting such holder or any others person to manufacture,use or sell any product,process or design, patented or otherwise,that may in any way be related to or disclosed by said drawings,specifications,or other date.

TITLE: POGO PIN (ø1.5*2.5)		 WIZCONN 深圳市为致康科技有限公司 Shenzhen Wizconn Technology Ltd.	
USE ON: CUSTOMER	DESIGN: B.Zhang	DWG NO.: FP152521-1	
MATERIAL:	CHECK: Scott.X	PART NO.: FP152521-1	
FINISH:	APPROVED Cliff.H	SCALE: 1:1	REV: SHEET: 1
THIRD ANGLE PROJECTION 		UNIT: mm	CAD FILE: OF

A B C D E F G H I J