
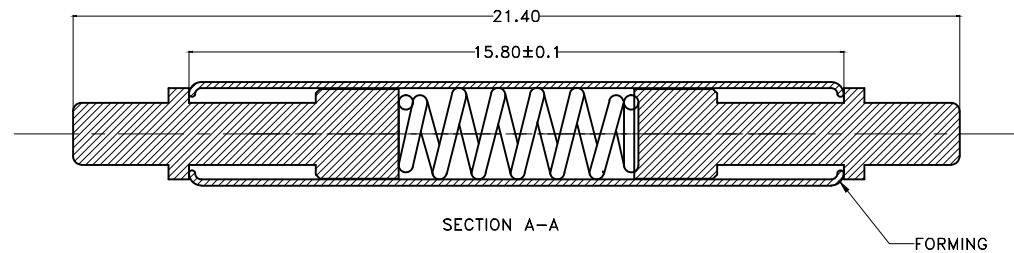


CUSTOMER OUTLINE DRAWING


REVISIONS

REV	DESCRIPTION	DATE	APPR
1	Initial release	31-May-18	S.X

BEFORE COMPRESSED

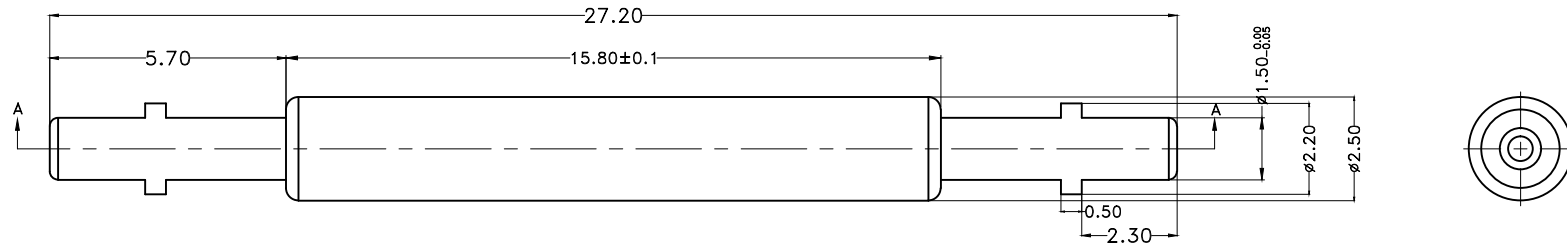

AFTER COMPRESSED

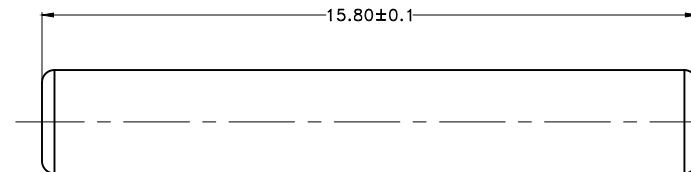

NOTES:

- Material
 - 1-1 Plunger: stainless steel,
 - 1-2 Body: stainless steel.
 - 1-3 Spring: stainless steel
- Spring force: Pre-load force is 150gf, 250±20gf at 2.9mm stroke
- Environmental Performance
 - 3-1 Storage and operating temperature range: -40°C~+85°C
 - 3-2 Humidity: 10% RH to 90% RH.
- Package: PE bag

UNLESS OTHERWISE SPECIFIED, TOLERANCE ARE:
X.±0.5 .X±0.1 .XX±0.05 .XXX±0.005 ANGEL±2

NOTICE- These drawing, specifications, or other data are, and remain property of wizconn corporation. (2) are confidential and not to be disclosed to any person other than those to whom they are given by wizconn corporation, or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

TITLE:

Hinge PIN
($\phi 2.5 \times 27.2$)



深圳市为致康科技有限公司
Shenzhen Wizconn Technology Ltd.

USE ON: CUSTOMER

DESIGN: B.Zhang

DWG NO.: G081015-1

MATERIAL:

CHECK: Scott.X

PART NO.: G081015-1

FINISH:

APPROVED: Cliff.H

SCALE: 1:1

REV: 2

SHEET: 1 OF 1

THIRD ANGLE PROJECTION



UNIT: mm

CAD FILE: