


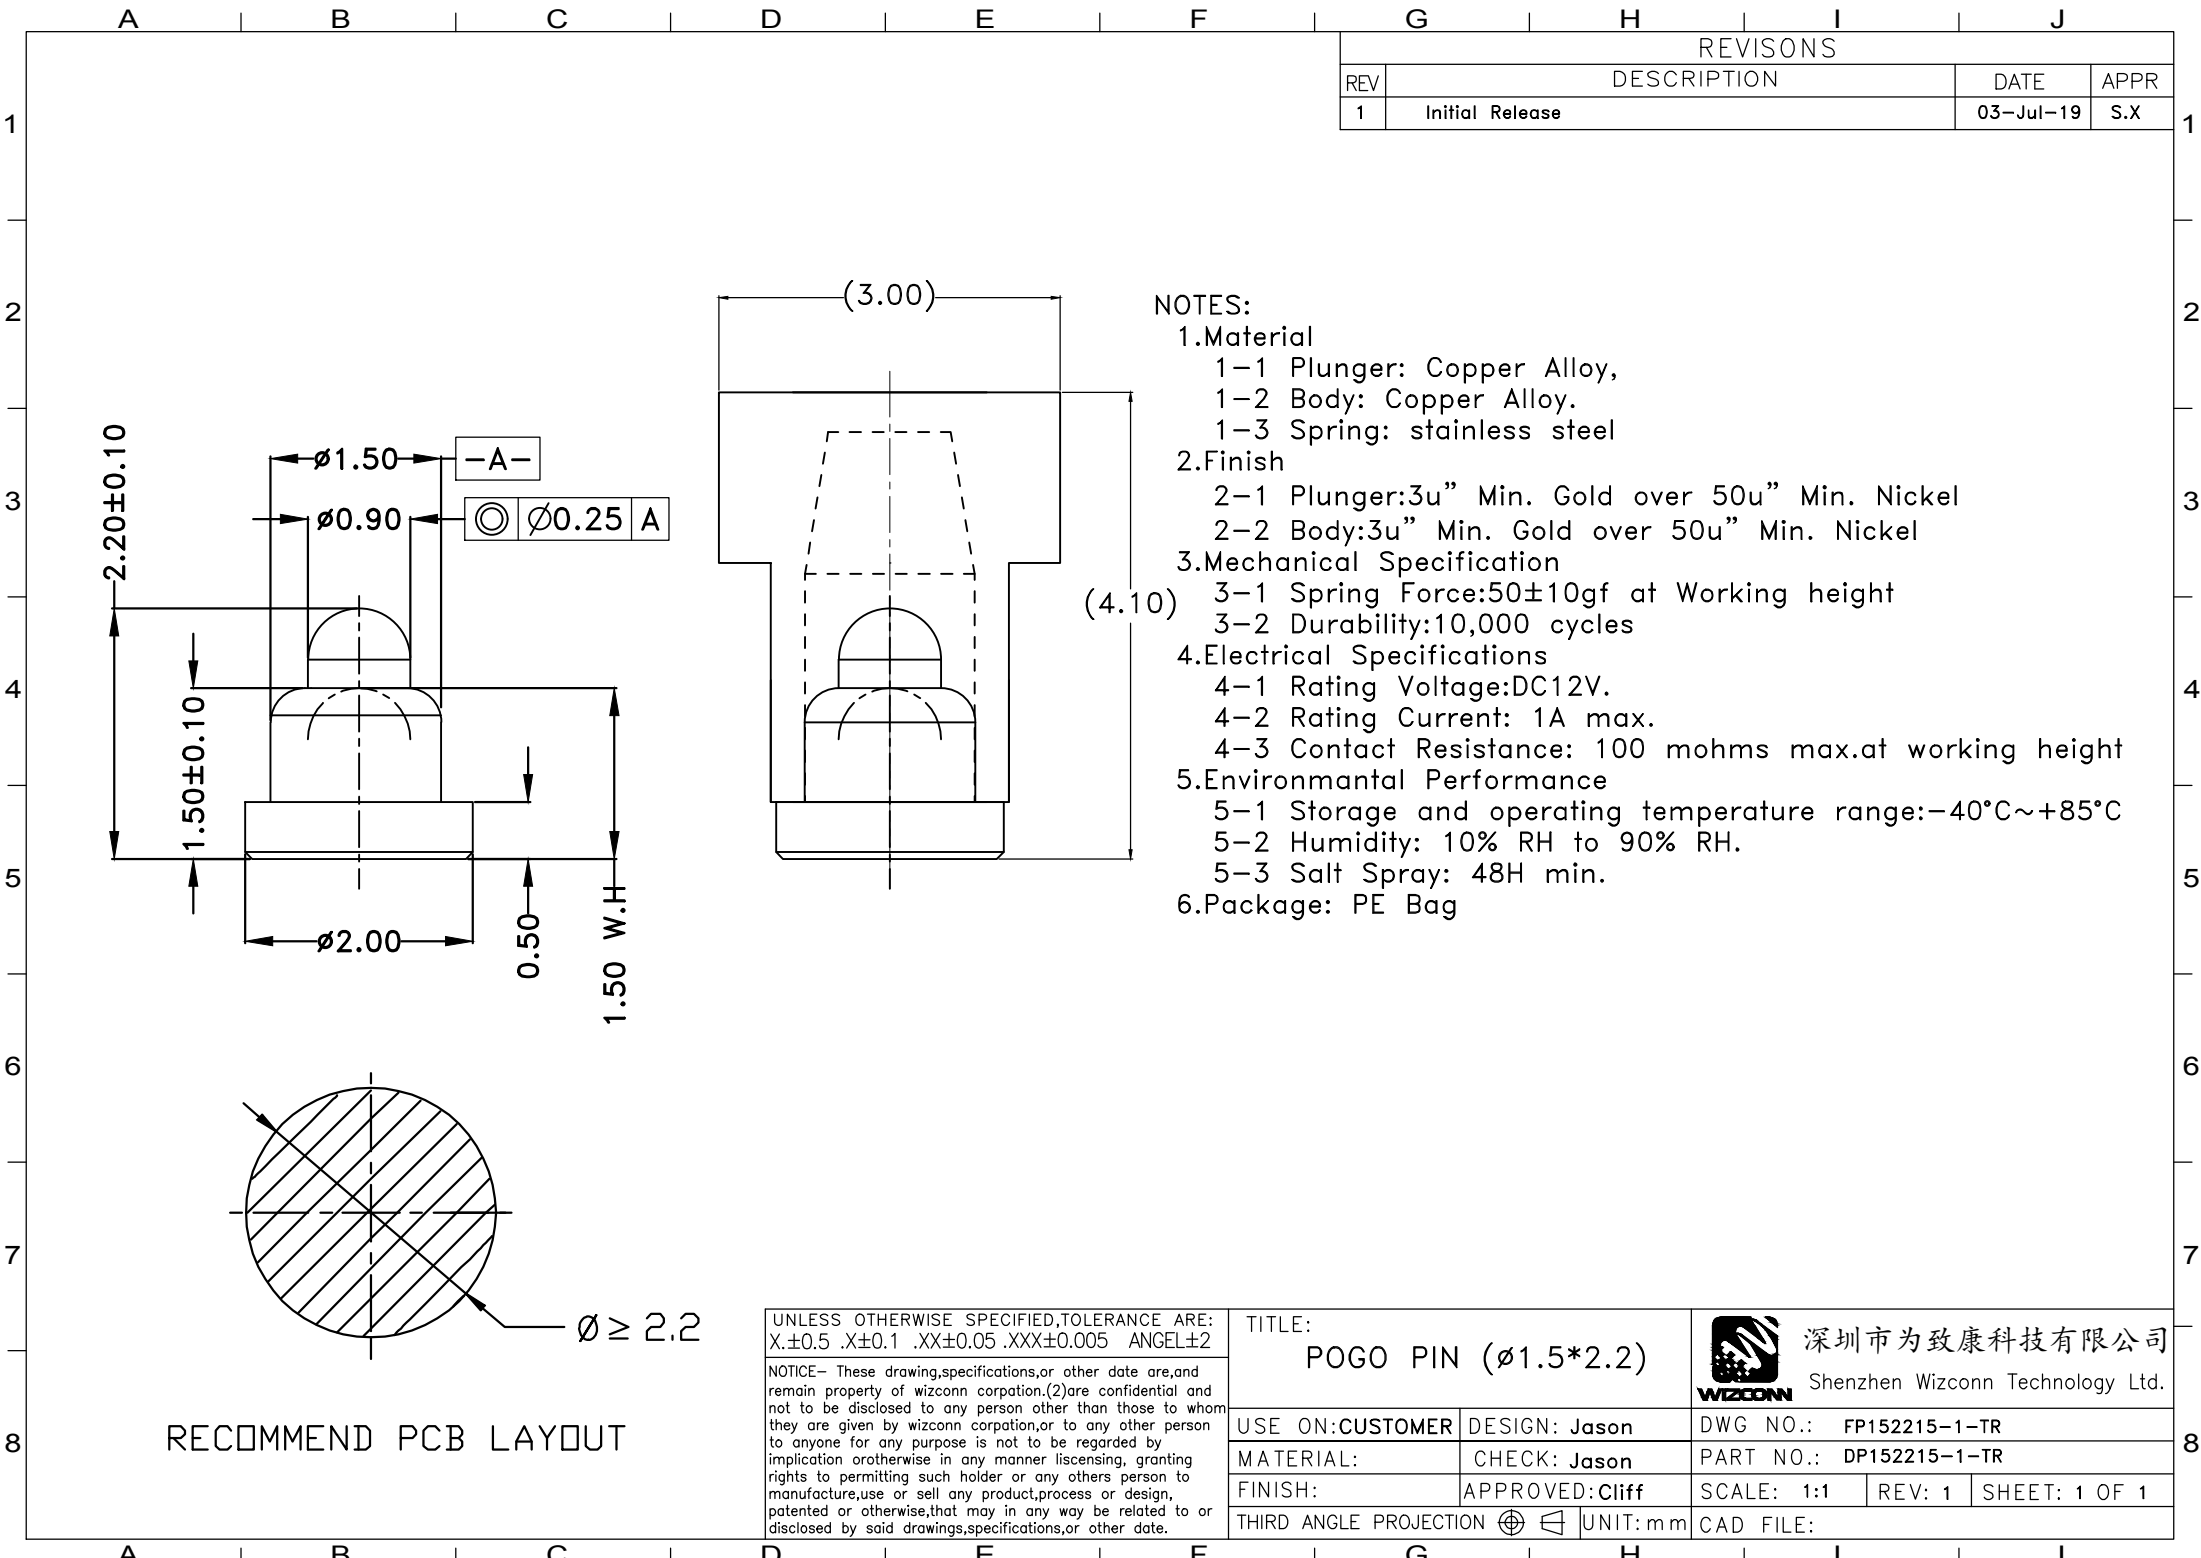

REVISONS			
REV	DESCRIPTION	DATE	APPR
1	Initial Release	03-Jul-19	S.X

- NOTES:
- 1.Material
1-1 Plunger: Copper Alloy,
1-2 Body: Copper Alloy.
1-3 Spring: stainless steel
 - 2.Finish
2-1 Plunger:3u" Min. Gold over 50u" Min. Nickel
2-2 Body:3u" Min. Gold over 50u" Min. Nickel
 - 3.Mechanical Specification
3-1 Spring Force:50±10gf at Working height
3-2 Durability:10,000 cycles
 - 4.Electrical Specifications
4-1 Rating Voltage:DC12V.
4-2 Rating Current: 1A max.
4-3 Contact Resistance: 100 mohms max.at working height
 - 5.Environmental Performance
5-1 Storage and operating temperature range:-40°C~+85°C
5-2 Humidity: 10% RH to 90% RH.
5-3 Salt Spray: 48H min.
 - 6.Package: PE Bag

UNLESS OTHERWISE SPECIFIED,TOLERANCE ARE: X.±0.5 .X±0.1 .XX±0.05 .XXX±0.005 ANGEL±2	TITLE: POGO PIN (ø1.5*2.2)		 深圳市为致康科技有限公司 Shenzhen Wizconn Technology Ltd.		
	USE ON: CUSTOMER	DESIGN: Jason	DWG NO.: FP152215-1-TR		
	MATERIAL:	CHECK: Jason	PART NO.: DP152215-1-TR		
	FINISH:	APPROVED: Cliff	SCALE: 1:1	REV: 1	SHEET: 1 OF 1
	THIRD ANGLE PROJECTION 		UNIT: mm	CAD FILE:	