


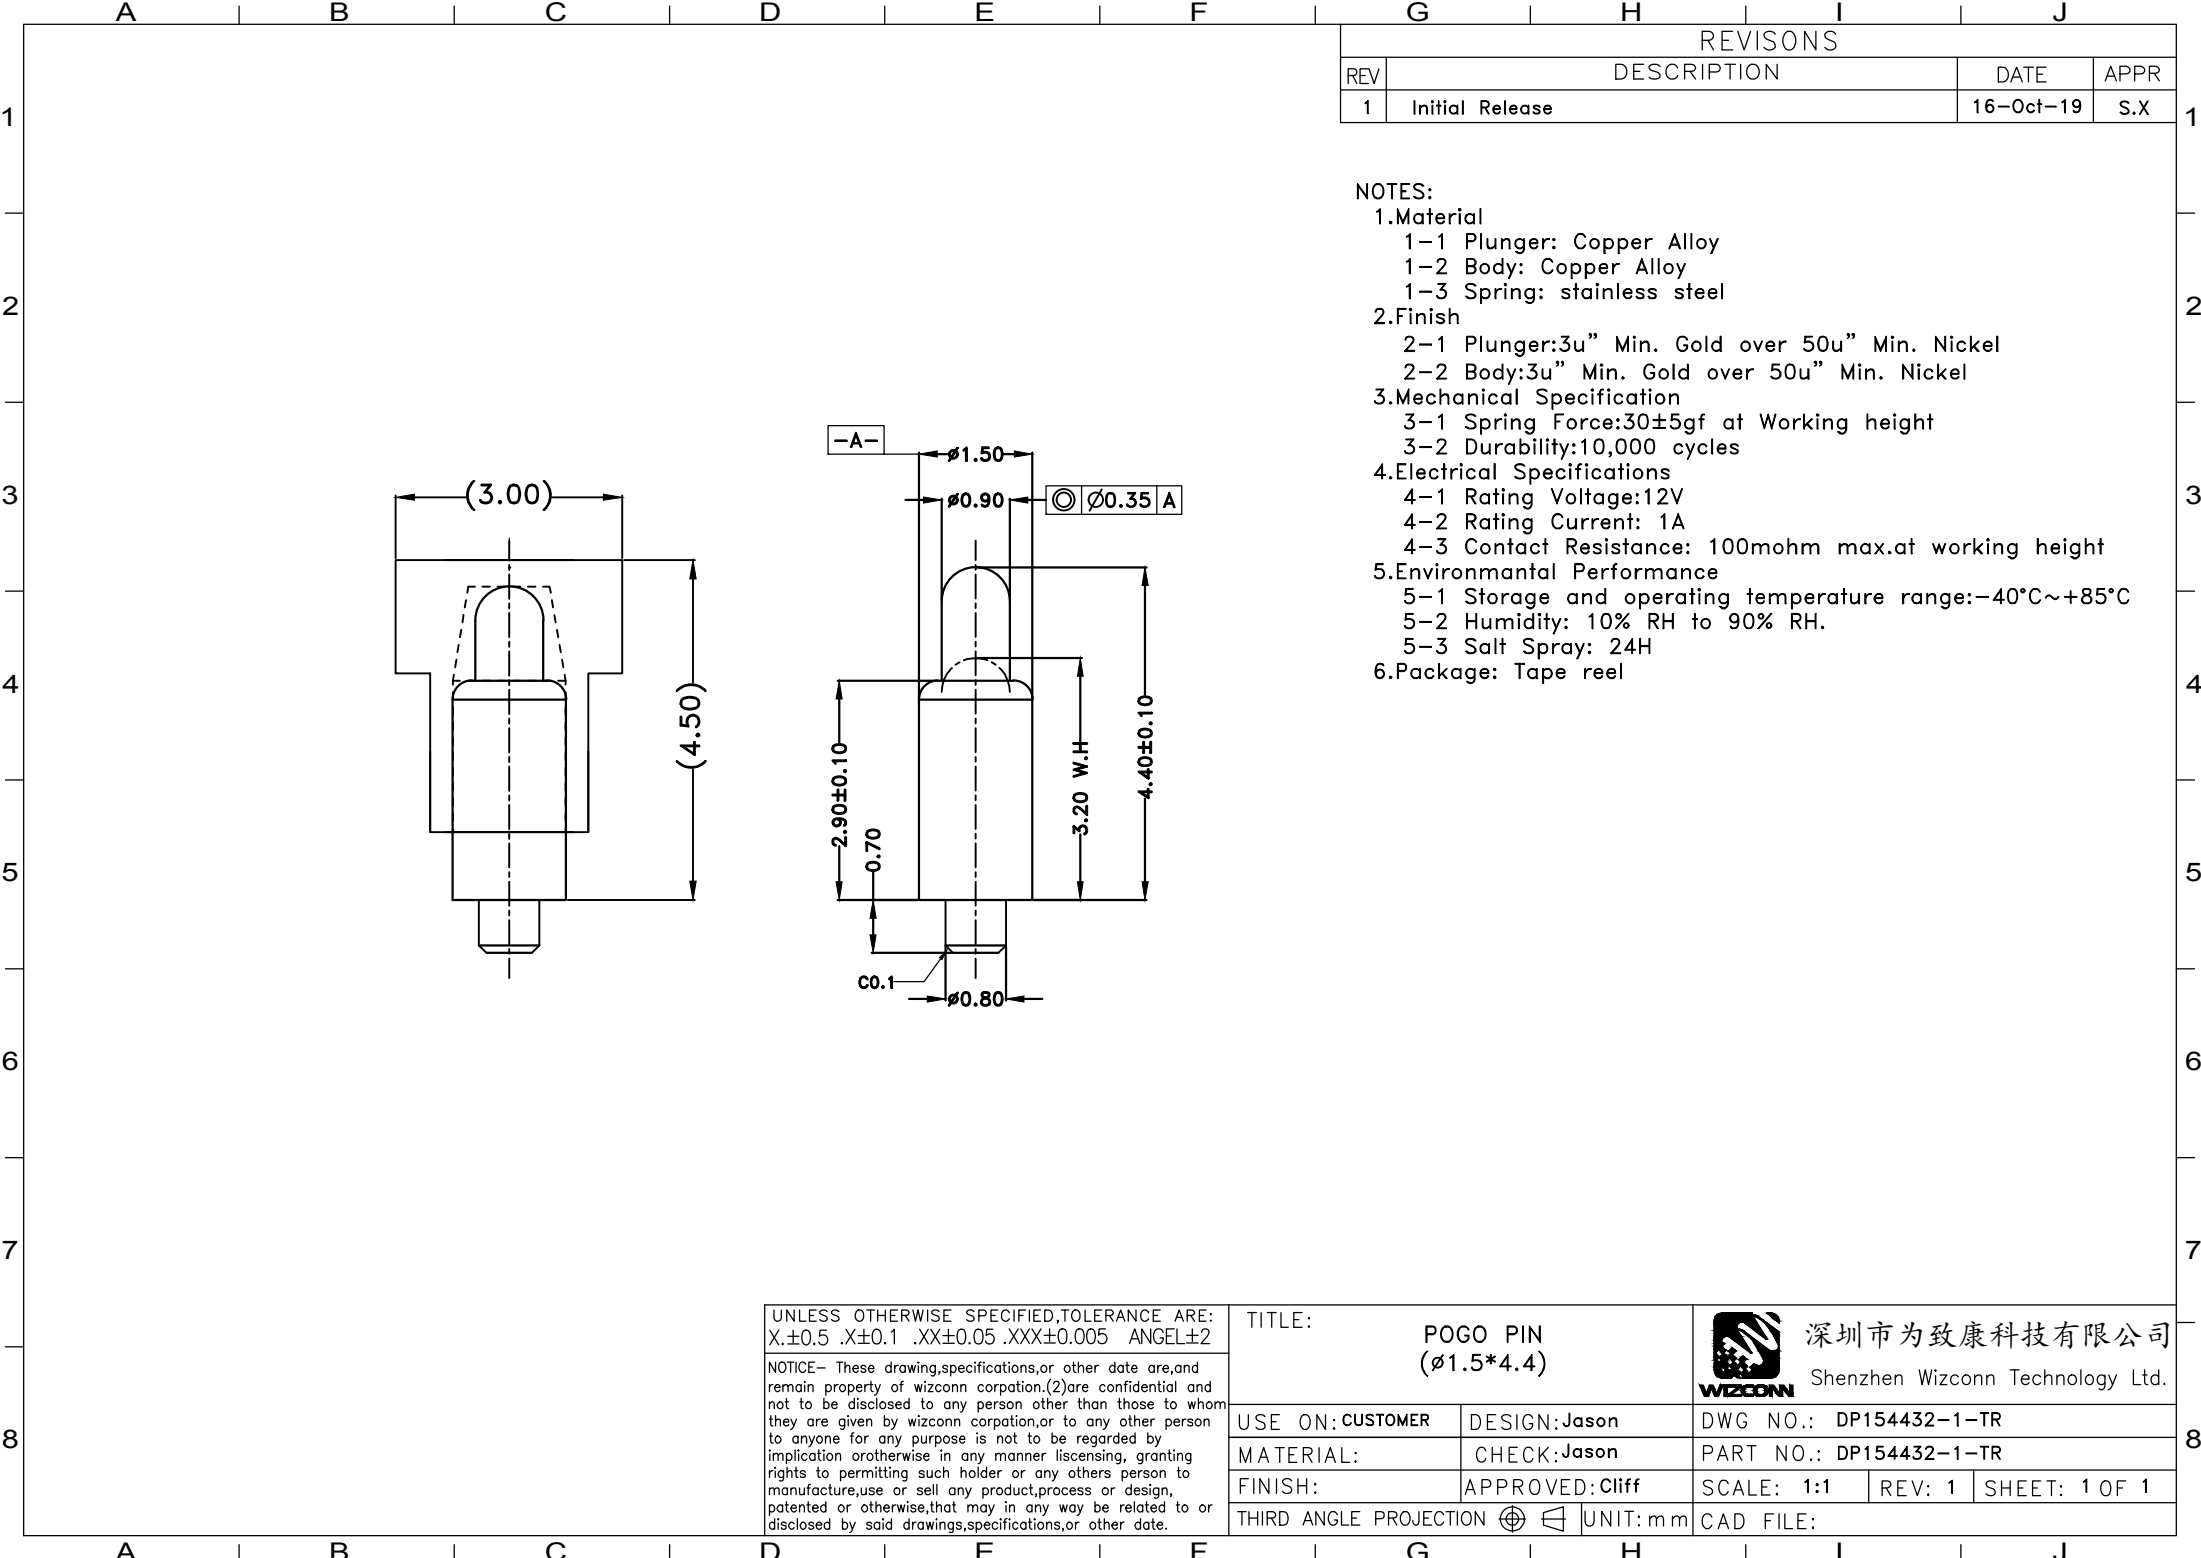

REVISIONS			
REV	DESCRIPTION	DATE	APPR
1	Initial Release	16-Oct-19	S.X

- NOTES:
- 1.Material
 - 1-1 Plunger: Copper Alloy
 - 1-2 Body: Copper Alloy
 - 1-3 Spring: stainless steel
 - 2.Finish
 - 2-1 Plunger:3u” Min. Gold over 50u” Min. Nickel
 - 2-2 Body:3u” Min. Gold over 50u” Min. Nickel
 - 3.Mechanical Specification
 - 3-1 Spring Force:30±5gf at Working height
 - 3-2 Durability:10,000 cycles
 - 4.Electrical Specifications
 - 4-1 Rating Voltage:12V
 - 4-2 Rating Current: 1A
 - 4-3 Contact Resistance: 100mohm max.at working height
 - 5.Environmental Performance
 - 5-1 Storage and operating temperature range:-40°C~+85°C
 - 5-2 Humidity: 10% RH to 90% RH.
 - 5-3 Salt Spray: 24H
 - 6.Package: Tape reel

UNLESS OTHERWISE SPECIFIED,TOLERANCE ARE: X.±0.5 .X±0.1 .XX±0.05 .XXX±0.005 ANGEL±2	TITLE: POGO PIN (ø1.5*4.4)		 深圳市为致康科技有限公司 Shenzhen Wizconn Technology Ltd.		
	USE ON: CUSTOMER	DESIGN: Jason	DWG NO.: DP154432-1-TR		
	MATERIAL:	CHECK: Jason	PART NO.: DP154432-1-TR		
	FINISH:	APPROVED: Cliff	SCALE: 1:1	REV: 1	SHEET: 1 OF 1
	THIRD ANGLE PROJECTION 		UNIT: mm	CAD FILE:	