


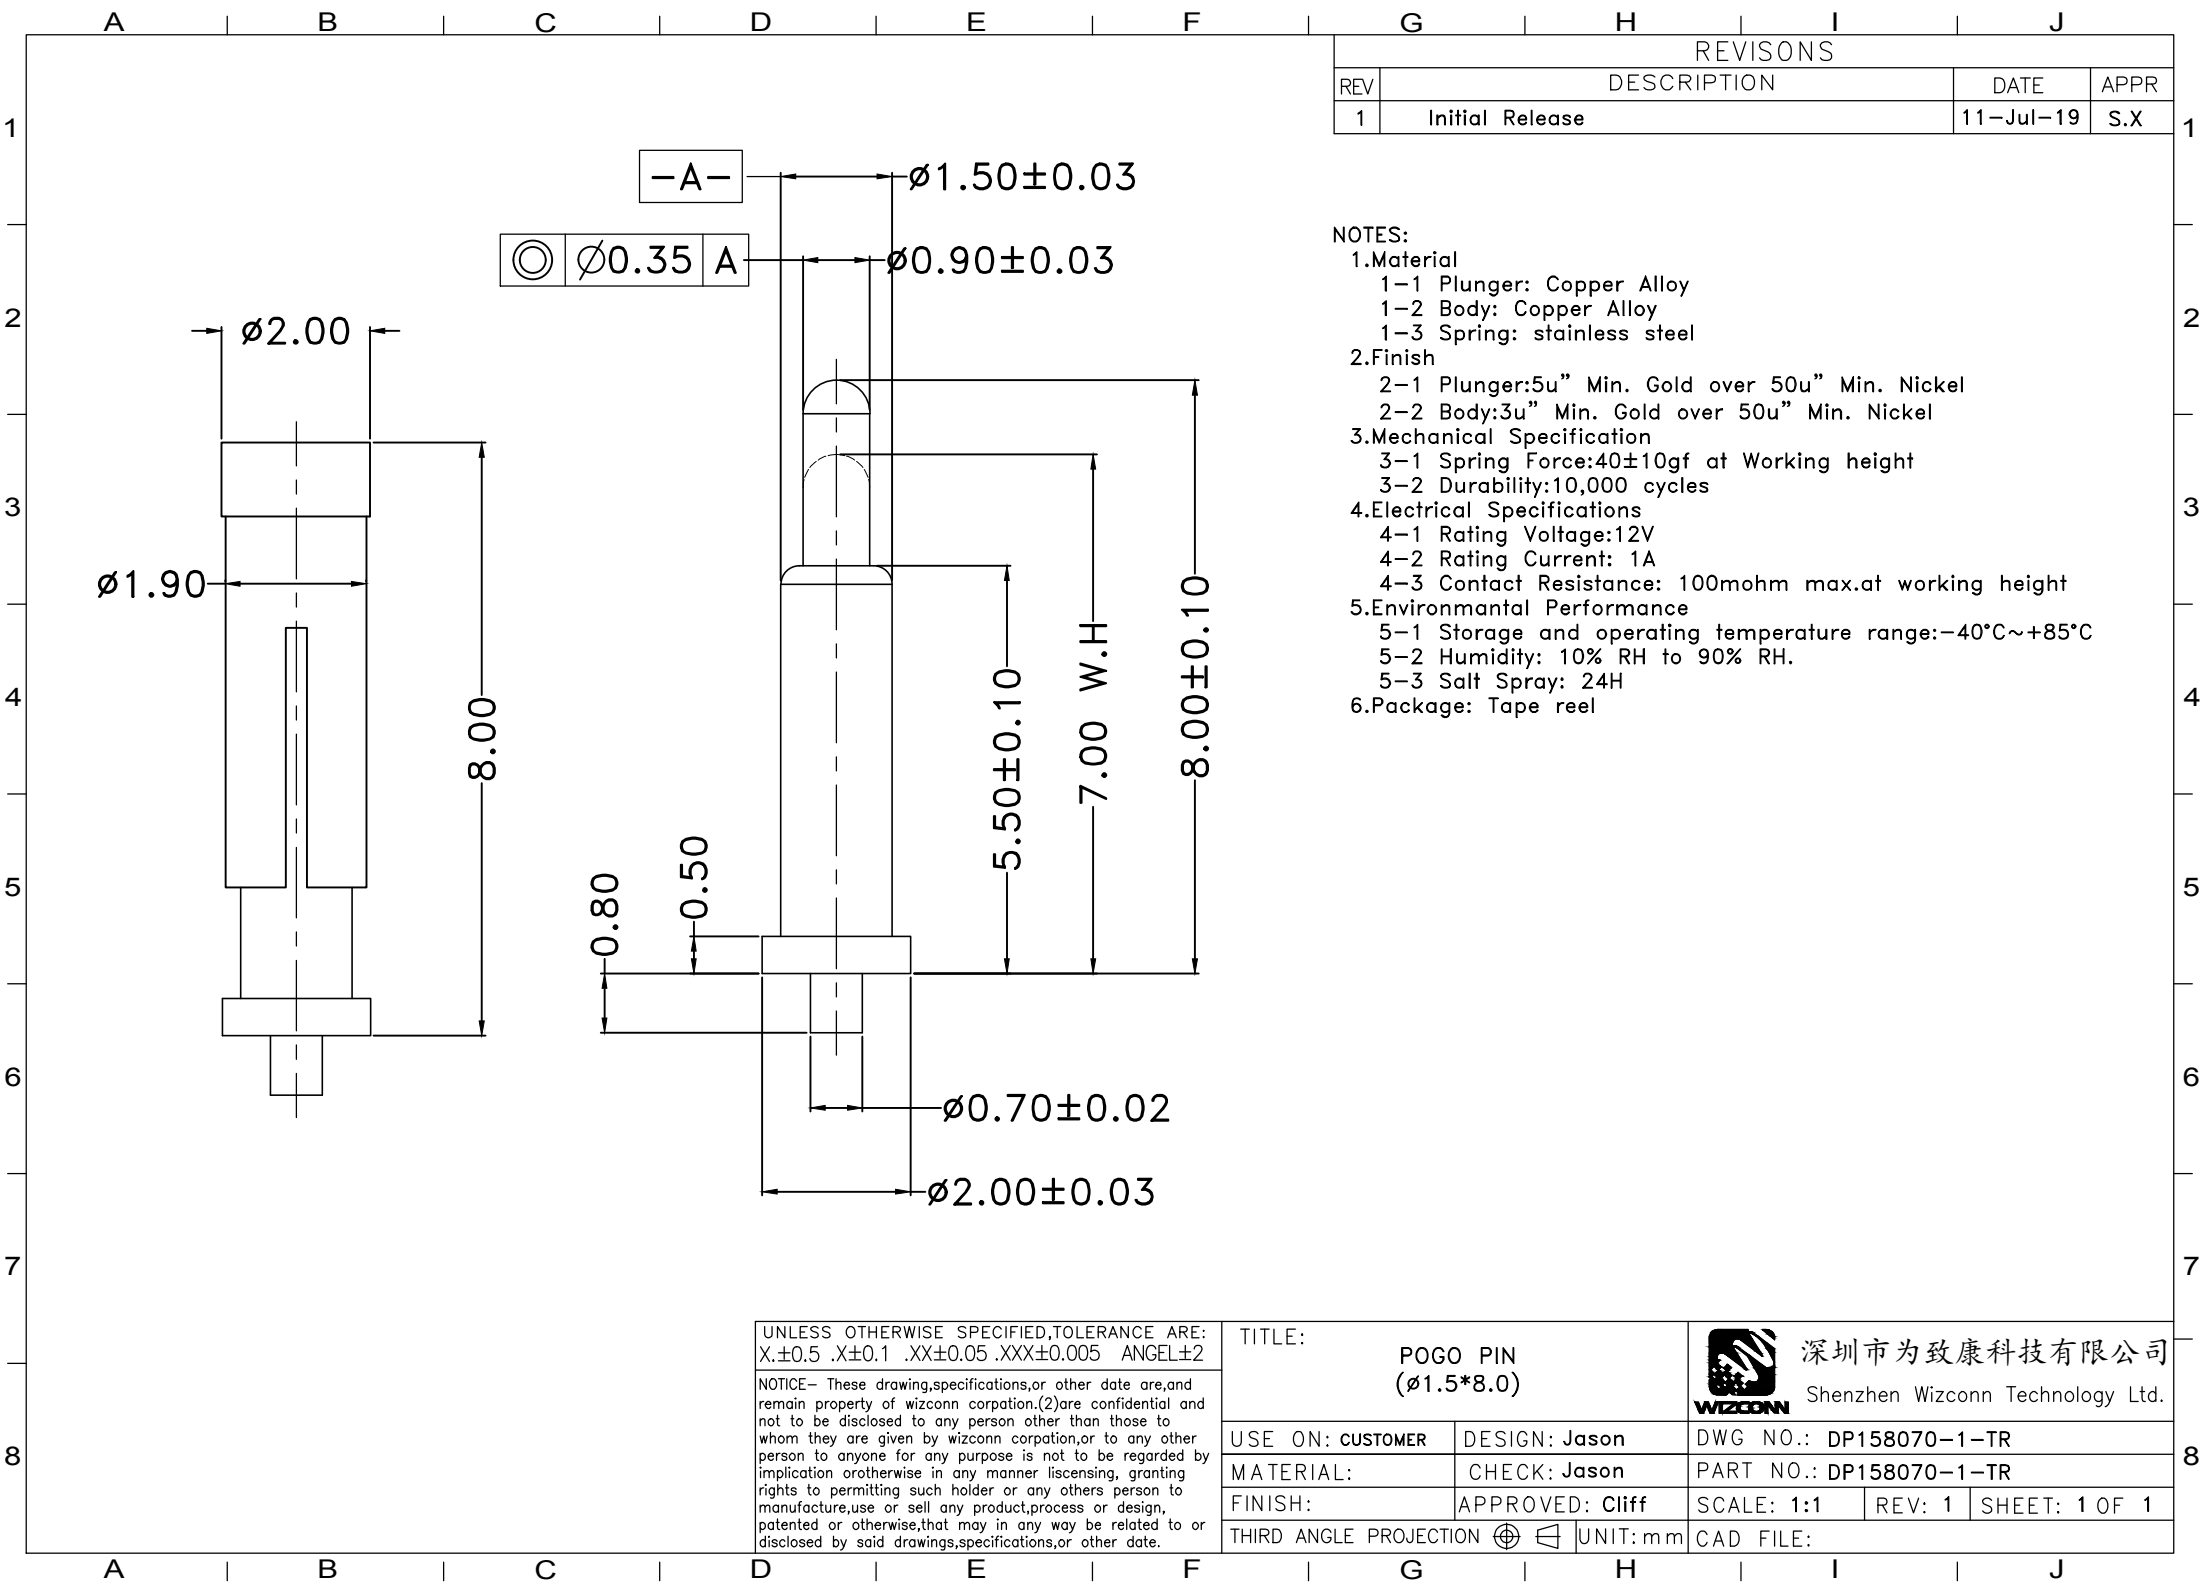

REVISONS			
REV	DESCRIPTION	DATE	APPR
1	Initial Release	11-Jul-19	S.X

- NOTES:
- Material
 - 1-1 Plunger: Copper Alloy
 - 1-2 Body: Copper Alloy
 - 1-3 Spring: stainless steel
 - Finish
 - 2-1 Plunger: 5u" Min. Gold over 50u" Min. Nickel
 - 2-2 Body: 3u" Min. Gold over 50u" Min. Nickel
 - Mechanical Specification
 - 3-1 Spring Force: 40 ± 10 gf at Working height
 - 3-2 Durability: 10,000 cycles
 - Electrical Specifications
 - 4-1 Rating Voltage: 12V
 - 4-2 Rating Current: 1A
 - 4-3 Contact Resistance: 100mohm max.at working height
 - Environmental Performance
 - 5-1 Storage and operating temperature range: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 - 5-2 Humidity: 10% RH to 90% RH.
 - 5-3 Salt Spray: 24H
 - Package: Tape reel

UNLESS OTHERWISE SPECIFIED, TOLERANCE ARE:
X. ± 0.5 .X ± 0.1 .XX ± 0.05 .XXX ± 0.005 ANGEL ± 2

NOTICE- These drawing, specifications, or other data are, and remain property of wizconn corporation. (2) are confidential and not to be disclosed to any person other than those to whom they are given by wizconn corporation, or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any others person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other date.

TITLE:		POGO PIN (ø1.5*8.0)		 WIZCONN		深圳市为致康科技有限公司 Shenzhen Wizconn Technology Ltd.			
USE ON: CUSTOMER		DESIGN: Jason		DWG NO.: DP158070-1-TR					
MATERIAL:		CHECK: Jason		PART NO.: DP158070-1-TR					
FINISH:		APPROVED: Cliff		SCALE: 1:1		REV: 1		SHEET: 1 OF 1	
THIRD ANGLE PROJECTION				UNIT: mm		CAD FILE:			