

CUSTOMER OUTLINE DRAWING

REVISIONS

REV	DESCRIPTION	DATE	APPR
X1	Initial release	24-Apr-17	S.X

NOTES:

1.Material

- 1-1 Plunger: Copper Alloy,
- 1-2 Body: Copper Alloy.
- 1-3 Spring: stainless steel
- 1-4 Housing:High temp. resistance plastic,UL94v-0,black

2.Finish

- 2-1 Plunger:3u" Min. Gold over 50u" Min. Nickel
- 2-2 Body:3u" Min. Gold over 50u" Min. Nickel

2.Mechanical Specification

- 2-1 Spring Force:50±15gf at Working height
- 2-2 Durability:10000 cycles


3.Electrical Specifications

- 3-1 Rating Voltage:36V max.
- 3-2 Rating Current: 1A max.
- 3-3 Contact Resistance: 30 mohms max.at working height

4.Environmental Performance

- 4-1 Storage and operating temperature range:-40°C~+85°C
- 4-2 Humidity: 10% RH to 90% RH.
- 4-2 Salt Spray: 24H min.

5.Package: PE bag

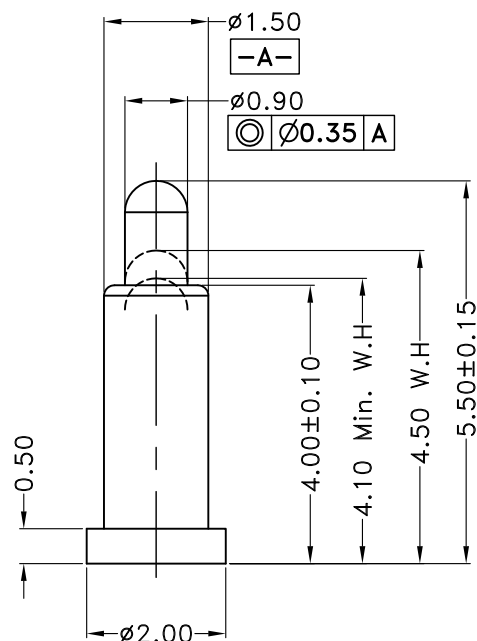

UNLESS OTHERWISE SPECIFIED,TOLERANCE ARE:
X.±0.5 .X±0.1 .XX±0.05 .XXX±0.005 ANGEL±2

NOTICE- These drawing,specifications,or other date are,and remain property of wizconn corporation.(2)are confidential and not to be disclosed to any person other than those to whom they are given by wizconn corporation,or to any other person to anyone for any purpose is not to be regarded by implication orotherwise in any manner licensing, granting rights to permitting such holder or any others person to manufacture,use or sell any product,process or design, patented or otherwise,that may in any way be related to or disclosed by said drawings,specifications,or other date.

TITLE:

POGO PIN(ø1.5*5.5)



深圳市为致康科技有限公司
Shenzhen Wizconn Technology Ltd.

USE ON:CUSTOMER

DESIGN: B.Z

DWG NO.: G011002-1

MATERIAL:

CHECK: SCOTT

PART NO.: G011002-1

FINISH:

APPROVED: CLIFF

SCALE: 1:1

REV: X1

SHEET: 1 OF 2

THIRD ANGLE PROJECTION

UNIT: mm

CAD FILE: